




Einschraubverschraubung, T-Form 180°

### CRTM-N

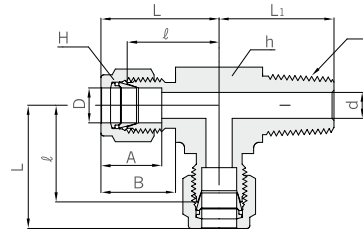

### Verbindung zölliger Rohre mit NPT Innengewinden

Bestellnummer	Rohr AD D		T (NPT)	d min.	Schlüsselweite				A	B	ℓ	L	L <sub>1</sub>
	Zoll	mm			h		H						
					Zoll	mm	Zoll	mm					
CRTM 2 - 2N	1/8	3,17	1/8	2,28	1/2	12,70	7/16	11,11	12,70	15,24	17,00	24,91	17,80
CRTM 2 - 4N	1/8	3,17	1/4	2,28	1/2	12,70	7/16	11,11	12,70	15,24	18,03	24,91	23,36
CRTM 3 - 2N	3/16	4,76	1/8	3,04	1/2	12,70	1/2	12,70	13,71	16,00	17,78	24,38	17,78
CRTM 4 - 2N	1/4	6,35	1/8	4,82	1/2	12,70	9/16	14,28	15,24	17,78	19,55	26,92	18,79
CRTM 4 - 4N	1/4	6,35	1/4	4,82	1/2	12,70	9/16	14,28	15,24	17,78	19,55	26,92	23,87
CRTM 5 - 2N	5/16	7,93	1/8	4,82	9/16	14,28	5/8	15,87	16,25	18,54	22,35	29,71	20,82
CRTM 6 - 4N	3/8	9,52	1/4	7,11	5/8	15,87	11/16	17,46	16,75	19,30	23,11	30,48	25,40
CRTM 6 - 6N	3/8	9,52	3/8	7,11	11/16	17,46	11/16	17,46	16,76	19,30	23,87	31,24	26,20
CRTM 8 - 4N	1/2	12,70	1/4	7,00	13/16	20,60	7/8	22,22	22,86	21,84	24,80	34,82	27,40
CRTM 8 - 6N	1/2	12,70	3/8	9,50	13/16	20,63	7/8	22,22	22,86	21,84	25,90	36,06	28,19
CRTM 8 - 8N	1/2	12,70	1/2	10,41	13/16	20,63	7/8	22,22	22,86	21,84	25,90	36,06	33,02
CRTM 10 - 8N	5/8	15,87	1/2	11,93	15/16	23,80	1	25,40	24,38	21,84	27,94	38,10	35,05
CRTM 12 - 12N	3/4	19,05	3/4	15,74	1-1/16	26,98	1-1/8	28,57	24,38	21,84	29,71	39,87	36,83

### Verbindung metrischer Rohre mit NPT Innengewinden

Bestellnummer	Rohr AD D	T (NPT)	d min.	Schlüsselweite		A	B	ℓ	L	L <sub>1</sub>
				h	H					
CRTM 3M - 2N	3	1/8	2,4	12,7	12	12,9	15,3	17,0	23,6	17,8
CRTM 3M - 4N	3	1/4	2,4	12,7	12	12,9	15,3	18,0	24,6	23,4
CRTM 4M - 2N	4	1/8	2,4	12,7	12	13,7	16,1	18,8	25,4	18,8
CRTM 6M - 2N	6	1/8	4,8	12,7	14	15,3	17,7	19,6	27,0	18,8
CRTM 6M - 4N	6	1/4	4,8	12,7	14	15,3	17,7	19,6	27,0	23,4
CRTM 8M - 2N	8	1/8	4,8	14,3	16	16,2	18,6	21,3	28,8	19,8
CRTM 8M - 4N	8	1/4	6,4	14,3	16	16,2	18,6	21,3	28,8	24,4
CRTM 10M - 4N	10	1/4	7,1	17,5	19	17,2	19,5	23,9	31,5	28,2
CRTM 10M - 6N	10	3/8	7,9	17,5	19	17,2	19,5	23,9	31,5	28,2
CRTM 12M - 4N	12	1/4	7,1	20,6	22	22,8	22,0	25,9	36,0	28,2
CRTM 12M - 6N	12	3/8	9,5	20,6	22	22,8	22,0	25,9	36,0	28,2
CRTM 12M - 8N	12	1/2	9,5	20,6	22	22,8	22,0	25,9	36,0	33,0
CRTM 16M - 6N	16	3/8	9,5	25,4	25	24,4	22,0	27,9	38,0	30,2
CRTM 16M - 8N	16	1/2	11,9	25,4	25	24,4	22,0	27,9	38,0	35,1
CRTM 20M - 12N	20	3/4	15,9	31,8	32	26,0	22,0	34,5	44,6	41,7

Alle Maße in Millimetern, sofern nicht anders angegeben. Maße nur zur Information, Änderungen vorbehalten.